

DAVIMAX

User manual
Rev 1

NOV 2022



Thank you

Thank you for choosing the Davinci and DAVIMAX harness.

This harness is for the XC harness who wants to be comfortable cross county flight.

It has been designed to effectively protect the pilot from the any unexpected condition.

Although the HARNESS has been certified of EN 1651 and LTF NfL II 91/09, paragliding is a dangerous sport that can be caused injury, physical disability and even death.

To reduce the risk to the pilot, we invest and challenge a lot of research and development. As a result, there are many Davinci's innovative technology like the bag protection system, In sight rescue parachute handle and it has clean zipper shape and modern design.

We wish you a comfortable and safe flight with the DAVIMAX

-Davinci Gliders team-

DAVIMAX





DAVIMAX



WARNING!

THIS IS NOT TRAINING MANUAL. ATTEMPTING TO FLY THIS OR ANY OTHER PARAGLIDER WITHOUT PROPER INSTRUCTION FROM A CERTIFIED PROFESSIONAL INSTRUCTOR IS EXTREMELY DANGEROUS TO YOURSELF AND BYSTANDERS.

DAVINCI GLIDERS are carefully manufactured and inspected at the factory. Please use the harnesses only as described in this manual.

Do not make any modifications to the harnesses.

As with any sport – without taking the necessary safety precautions, paragliding can be dangerous.



Contents

Thank you	3
Warning	5
Introducing the DAVIMAX	7
Before you fly	9
Connecting the carabiner	9
Installing the seat plate	10
Installing the back protector	11
Installing the speed system	12
Rescue Installation and compatibility check	13
Attaching the rescue container bag to the harness recue parachute handle.....	14
The recue deployment bag and the harness deployment handle.....	15
Rescue inner bag packing	16
Connecting the rescue bridle	17
Rescue installation guide	19
Adjustments	21
Shoulder straps	22
Lateral Straps	23
Chest straps	24
Lumbar Strap	25
Leg Strap	26
Skirt	27
Flying with the DAVIMAX	28
General warnings and advice	28
Pre-flight checks	28
Landing with the DAVIMAX	29
Miscellaneous	29
Maintenance and repairs	30
Activate the reserve parachute	32
Materials	33



Introducing the Harness

Harness spec	S	M	L
Height (cm)	150-175	170-185	180-195
Pilot weight (kg)	60-85	70-95	80-120
Board Width (cm)	29	30	34
Board Depth (cm)	39	40	41
Height of Suspension Point (cm)	43	44	47
Harness Weight (g)	5900	6140	6500
Back protection type	Foam		
Min/Max container volume (cm3)	3000-6500		

Certification

The DAVIMAX has EN 1651 and LTF NfLII 91/09 certification, max load 120 DaN


DAVIMAX



Components and Features

Components

1. Harness
2. Back Protection
3. 45mm Al Carabiner
4. Honeycomb Seat Plate
5. Honeycomb Foot Plate
6. Rescue handle+Inner container (2PCS)



DAVIMAX



Before you fly

Double check that your dealer has checked the integrity and basic settings of the harness. The harness should be assembled by appropriately qualified paragliding instructor.

- **Connecting the carabiner**

Before your flight, you have to make sure the connection with the Harness with the carabiner like this picture.



Installing the seat plate

The seat plate can be removed and accessed on the back of the seat. Disconnect the leg strap and pull it back to remove it. Place the leg straps on the back edge of the sheet when installing the seat plate. The seat plate must be installed with the rounded edge to the backward and the front curve facing downward.

You have to check the leg straps pass the rounded edge like last picture



Installing the back protector

The DAVIMAX has a 15cm back foam protector which is installed through the back container pocket. To assemble the back protector, open the back container pocket and insert the it as shown below. Make sure that the end of the small part of the protect size is inserted first. The rear protector should easily enter its place and fit neatly inside the rear protector compartment. The Protector should be placed under the webbings. And close the zipper to finish.



Installing the speed system

- (1) Pass the speedbar's string through the pulley on the side harness.
- (2) After second pulley, route the line through the metal ring at the bottom edge of the seat
- (3) Connect the line to the speedbar using a certain knot



DAVIMAX



Rescue Installation and compatibility check

Davinci gliders recommends that rescue installation should be performed by a instructor who has the license of rescuepacking. Rescue parachute is a last resort for pilots and can cause death or serious injury if the preparatory parachute is not packed or connected in the right way. The pilot is responsible for ensuring the parachute is properly installed. This harness is compatible with the Davinci Gliders's COMMA and Comma # lite. The rescue from other manufacturers can also be used, we do not guarantee each function.

The pilot must be responsible for checking compatibility. Whenever a rescue system is first installed on the harness, a qualified paragliding professional instructor should check compatibility. To check the valid of that installation, you need to perform the test at the simulation hanger.

Rescue parachutes should be repacked at least every 6 months

WARNING: If you have any doubts regarding installation, find the expert's advice!

IMPORTANT: You must perform a trial test at the simulator to verify the installation.



Attaching the rescue container bag to the harness rescue parachute handle

Harness is included inner container and rescue handle. The handle have to be connected to the rescue container bag. For the connection, you have to check the length of the strap. It must be longer than the connecting plastic pin not being pulled before the strap tightens on the reserve. But it is not so long, the movement may be restricted before the plastic pin exits.

The containers of other manufacturers may have different shape, pin and position. It could be caused a operation failure to opening reserve.

So, we strongly recommend that you have to check contact your dealer or instructor to check the condition of your rescue which is installed like the manual.

WARNING: If you have any doubts regarding installation, find the expert's advice!

IMPORTANT: You must perform a trial test at the simulator to verify the installation. Be sure to use the inner bag provided by Davinci.



THE RESCUE DEPLOYMENT BAG AND THE HARNESS DEPLOYMENT HANDLE

The rescue container for this harness comes with its own deployment handle. This handle and its strap must be connected to the deployment bag of the parachute. In particular, check the length of the strap connecting the rescue deployment handle to the rescue inner container. It should be long enough that the reserve can be extracted without the danger of the pins not being pulled before the strap tightens on the reserve, but not so long that there is excessive slack that extends the movement required for deployment.

The deployment bag of other manufacturers' rescue systems may have different loop positions which may cause a deployment failure. Be sure to contact your parachute dealer or a qualified professional to check the connection, position and secure deployment, and refer to the rescue manual for details. The rescue handle and inner container supplied with the DAVIMAX should already be connected.




DAVIMAX



Rescue inner bag packing

Your rescue should be repacked into the supplied inner containers as follows.

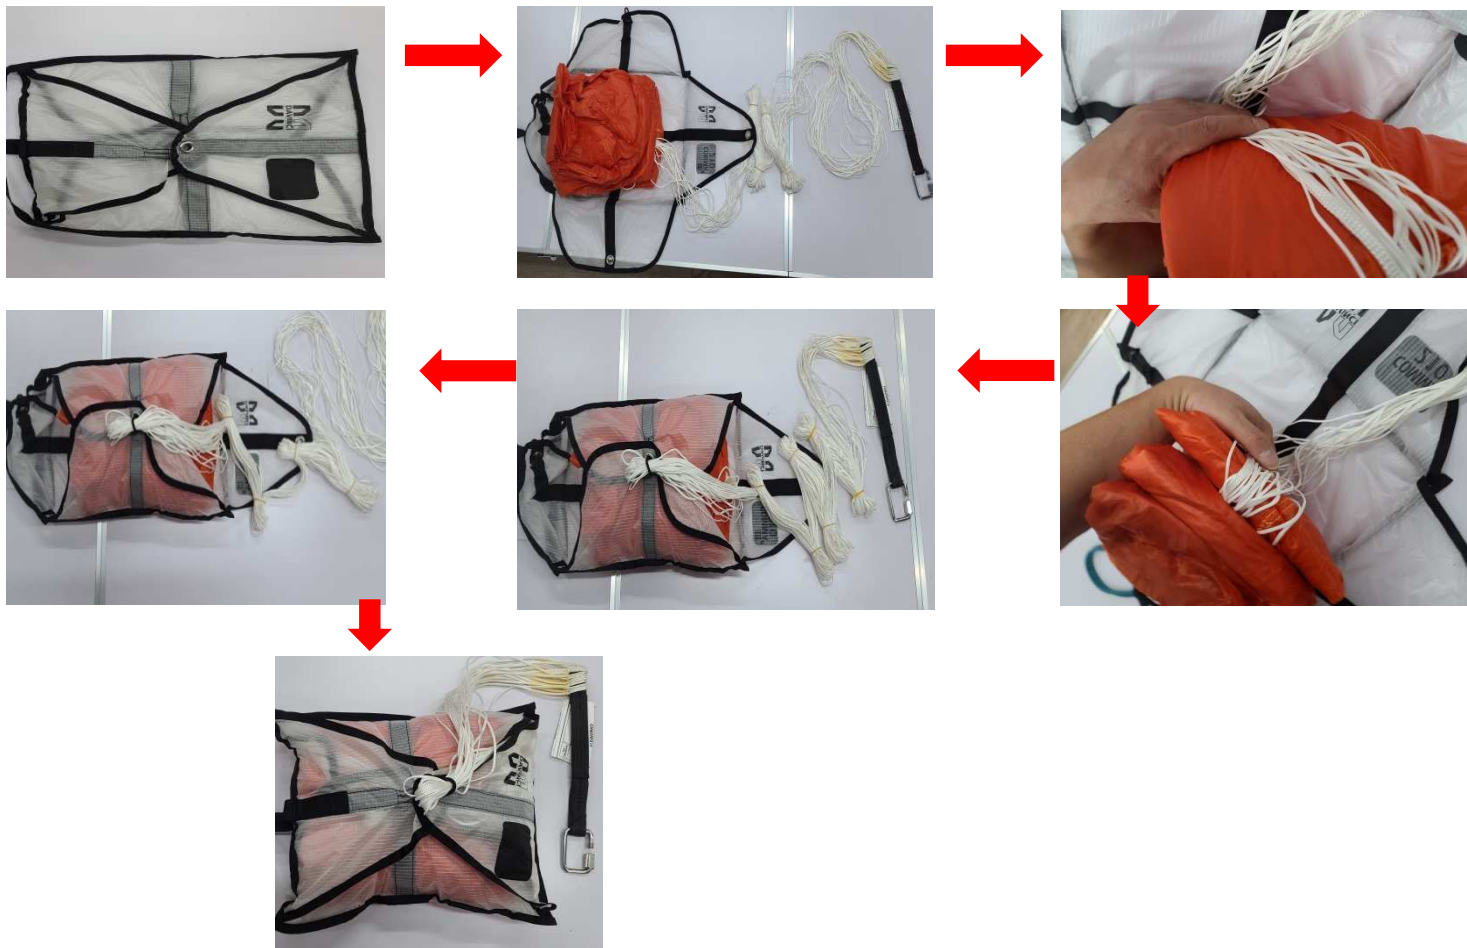

Connecting the rescue bridle

Open the bridle covered zipper to access to the parachute attachment point
Connect each riser to harness, please proceed as shown here below.

If your rescue doesn't allow this Lark's head knot assembly, you can use a mailon with enough strength. Then follow the rescue instructions or contact a flight instructor or professional experienced in installing paraglider rescues.



Connecting the rescue bridle



DAVIMAX



Rescue installation guide

The right installation of rescue parachute is the most importance process.

Begin by first connecting the bridle and the rescue handle to the rescue parachute

-put the rescue into the rescue pocket of the harness with the handle connection close to the pilot and the extra rescue

-Bridle and connection lines neatly folded at the bottom of the container

-Using the line included with your harness pull the built in loops through the metal rings in the order like below pictures

-Zipper up to the end and fold the loose zipper spare only once and cover it with magnetic



Rescue installation guide



DAVIMAX




Adjustments

Adjust your harness to fit your body type and flight style. It is important to adjust correctly so that you can slide easily into the sitting position after takeoff. A misaligned harness can negatively affect the flying characteristics of a paraglider.

Hang on the simulator to make adjustments before the first flight and fine the right settings if necessary during the first few flights.

1. Shoulder straps
2. Lateral Straps
3. Chest Strap
4. Lumbar Strap
5. Leg Straps
6. Skirt

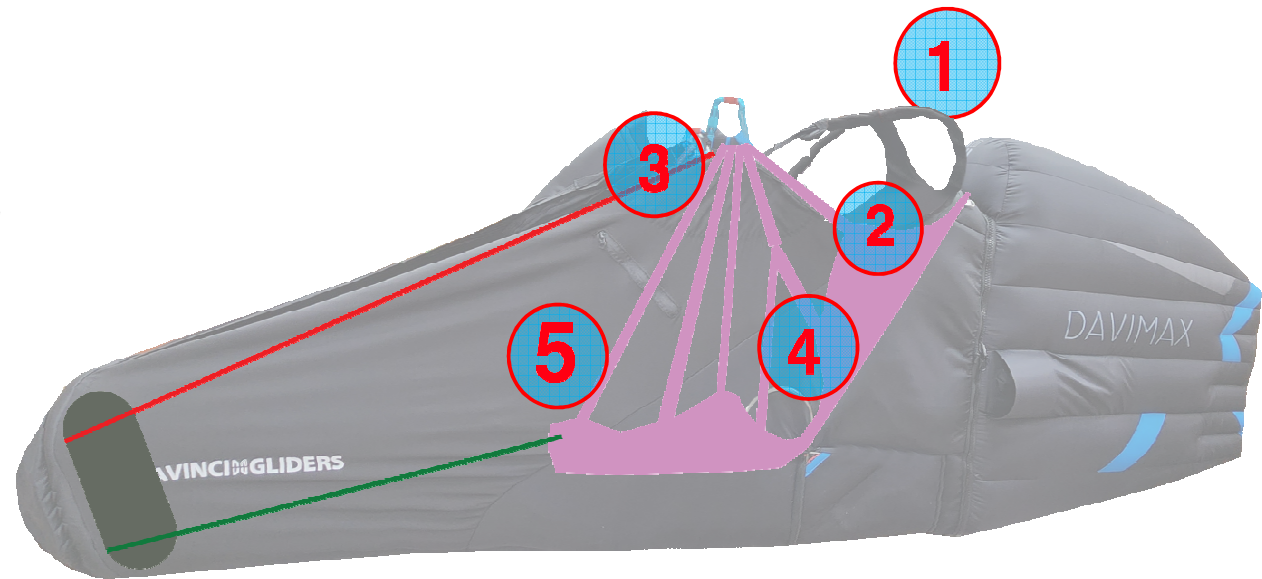

(1) Shoulder straps

The optimum setting for the shoulder straps depends on the height of the pilot. Step into the harness and stand upright with the breast strap closed, symmetrically adjust the shoulder straps until they are a snug fit, but not tight.

To tighten: pull down on the webbing strap(1)

To loosen: pull up on the webbing strap(2)



(2) Lateral Straps

The lateral strap can adjust the angle between the thigh and back. Increasing the strap increases the angle, and decreasing the angle. The most comfortable position for yourself is to adjust in flight from calm weather. The attitude of flying in a reclining position reduces the stability of the harness and increases the possibility of twist of the riser.

To tighten, pull forward on webbing strap(1)
To loosen, pull back on the webbing strap(2)



(3) Chest Strap

The adjustment of the chest strap controls the distance between the carabiners and affects the handling and stability of the glider. Widening the distance between the carabiners increases feedback from the wing and allows for easier weight shifting. Closing the strap gives you a more stable feeling in turbulence but increases the risk of stable spiral and also the risk of twisting! The chest strap may also be adjusted in flight according to the conditions; for example, it may be tightened in turbulent air and flown at a looser setting in less turbulent or weak conditions.

To tighten, pull the black webbing strap to the left.
To loosen, pull the black webbing strap to the right.



(4) Lumbar support


For optimal ergonomic support in the lower lumbar region and adjustment of the sitting depth.

To tighten, pull forward on webbing strap(1)
To loosen, pull back on the webbing strap(2)



(5) Leg straps


The roots of the leg straps are positioned high, a characteristic of the Get-Up system, and this ensures great freedom of movement for the legs. Generally, the factory setting are correct. If it is difficult to enter the harness after launch, we suggest tightening the leg strap adjustment under the seat. This makes it easier for the pilot to enter the harness after launch without having to let go of the paraglider's control handles.

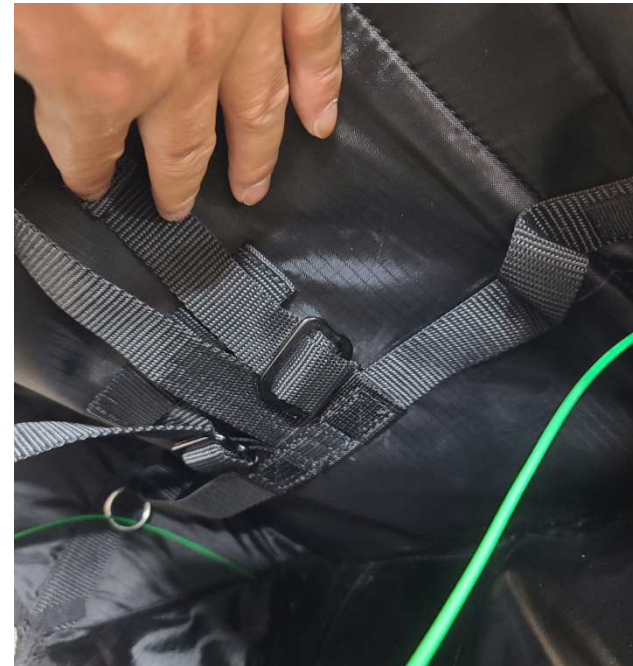

(6) Skirt

Skirts should be tight and fabrics should be soft with wrinkle-free for the most aerodynamic shape. The nose of the skirt should be straight and pointed slightly downwards.

- (1) Tighten the upper line to raise the upper skirt and loosen it to lower the nose to lengthen the skirt.
- (2) Adjust the overall length of the pod by tightening the bottom line.

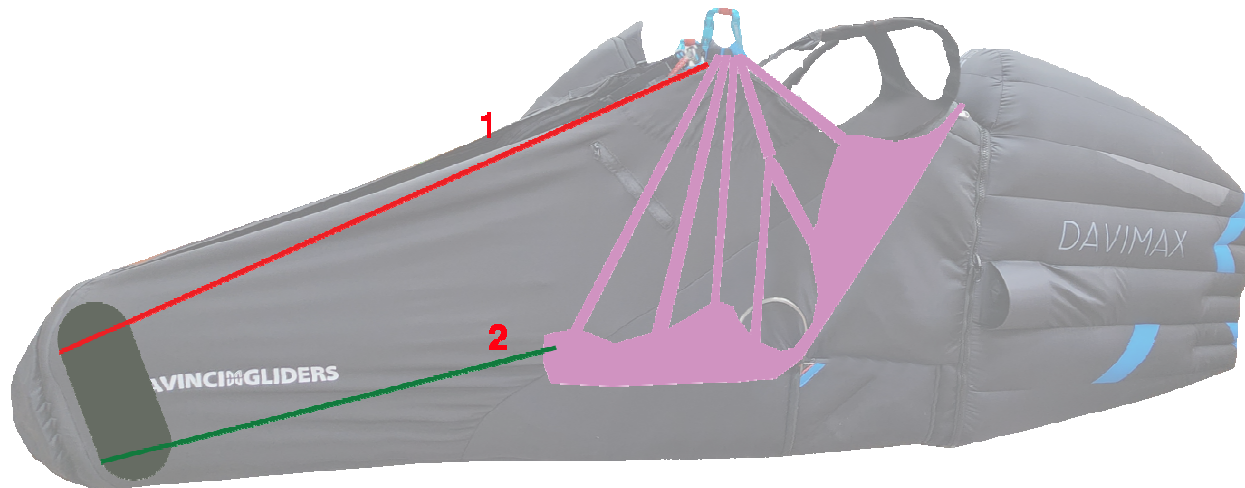

Flying with the DAVIMAX

General warnings and advice

Before every flight, check the following

- ☒ Are you in good physical and mental condition?
- ☒ Are you familiar and compliant with all applicable laws and regulations in your area?
- ☒ Are you briefed thoroughly about the site, airspace and expected weather conditions of the day?
- ☒ Is your equipment and choice of site suitable for your level of experience?
- ☒ Do you have a suitable helmet, gloves, boots, eye-wear and adequate clothing?
- ☒ Are you carrying some form of identification, so that people know who you are in case
- ☒ of an accident? Take along a radio and mobile phone if possible.

Pre-flight checks

As part of your normal pre-flight check routine, check:

- ☒ Is there any damage to the harness or carabiners that could affect its airworthiness?
- ☒ Are all buckles, belts, zips securely fastened? Buckles should click into place as you close them, and a gentle pull on the fastened buckle verifies this. Secure any zips after fastening the buckles.
Take extra care in snowy or sandy environments.
- ☒ Is the paraglider connected correctly to the harness with both carabiners secured by their
- ☒ locking mechanisms?
- ☒ Are all pockets closed properly and any loose items tied down safely?



Landing with the DAVIMAX

Before landing, take your feet off from the skirt and slide your legs forward in the harness so that you adopt the standing position. AVOID land in the seated position—it is very dangerous even if you have back protection. When you landed with the DAVIMAX, you have to check the rescue parachute handle which is the right position and whether the rescue is opened.

Miscellaneous

Towing

The DAVIMAX can be used for towing launches. Towing bridge release requires the carabiner to hang directly into the main carabiner with the opening bar facing backwards. For more information, see the documentation provided with the tow release, or contact an authorized tow instructor on the flight site.

Flying over water

The DAVIMAX has the skirt which has the risk of pilots swimming, so you must avoid landing water in any case.

Installation of outer container

Davimax has two rescue pocket, you do not need to install the additional outer container.



Maintenance and repairs

The materials used in this harness are composed of the best materials to ensure durability. Nevertheless, in order to ensure the longest possible safe operation, keep the harness as clean and intact as possible.

Care and maintenance

Don't drag the DAVIMAX on rough or rocky ground. Avoid unnecessary exposure to UV, heat and moisture.

Store all equipment in a cool, dry place and never store them in wet or wet conditions.

Use a plastic brush and/or a damp cloth to wipe off dirt regularly. If there is unusually dirt, wash it with water and mild soap. First remove the entire subcomponent. Allow the harness to dry naturally in a well-ventilated area, away from direct sunlight. Sometimes lubricate the pinch and buckle at least once a year with a silicone spray. After hard and harness landing, the seat belt must be checked for damage and make sure the sand does not enter the buckle.

Inspection checklist

The harness should be checked and rescue parachutes should be repacked at least every 6 months. Additional inspections should be carried out after a collision, landing or take-off, or if there are signs of damage or excessive wear. Always find the instructor or dealer's advice in case of doubt.

The main aluminium carabiners must be replaced at least every 5 years or after 500 hours, whatever comes first. Impacts may create undetectable cracks that could result in structural failure under continuous load.



Repairs

A authorized by the Davinci Gliders must carry out all repairs related to the important part of the harness. This uses the correct material and repair techniques.

Quality and service

Wir sind sehr stolz auf die Qualität der hergestellten Produkte und bemühen uns, alle Probleme im Falle eines Falles zu beheben von Herstellungsfehlern, die die Sicherheit oder Funktion des Geräts beeinträchtigen können. Wenn es ein Problem mit der Ausrüstung sollte der Davinci-Händler der erste sein, der sich mit Ihnen in Verbindung setzt. Wenn Sie den Händler nicht kontaktieren können oder den Importeur des Davinci kontaktieren Sie den Davinci Glider direkt über unsere Website (www.flydavinci.com)

Care of the environment

We have the privilege of flying, which is difficult for anyone to enjoy in outstanding nature. Try to respect and preserve nature with minimal environmental impact. When visiting a new area, contact your local club or team in advance for details on environmental concerns and regional limitations.

At the end of the paraglider's life, discard it in consideration of it and follow local regulations



Activate the reserve parachute

It is a good idea to check the position of the reserve parachute handle frequently during flight whenever you can afford it.

By doing so, you will be able to maximize the time given the paraglider throws a reserve parachute out of control.

It is necessary to first estimate the altitude above ground level (AGL) and, if high enough, try to return the wing to normal flight. But if you're unsure at all times, deploy your emergency parachute quickly.

Rescue parachute deployment should only be done in an emergency situation only

With a strong lateral and vertical pull, pull the handle toward you and then throw the parachute (including container and handle) away into a clear, unobstructed area in the sky.

Gather as many gliders as possible while the parachute opens and falls. At this point, pull the "C" or "D" riser or toggle/brake toward you as symmetrically as possible.

Prepare to land by standing in an upright position with your knees together and your legs slightly bent.



Materials

Harness		Fabric code
Fabric	Outer	1000D CODRA 210D Rip stop Nylon
	Inner	140D 2WAY SPAN PLAIN 70D EXTREEMA R/S
Webbing		Nylon 25mm 12mm Dyneema 362
Thread		210D/9, D/6 Bonded Polyester



An attitude for altitude

53 Shinchon-gil, Okcheon-myeon,
Yangpyeong-gun, Gyeonggi-do,
Republic of Korea

www.flydavinci.com

